

# DRIVE THE CHANGE



**CORMIDI**

**C200**  
DUMPER



DRIVE THE CHANGE

## MAXIMUM EFFICIENCY



After long testing and optimization, our machines are being continuously improved to offer you the best solution for your work. Our machines have the best efficiency and performance in the market.

## UNDERCARRIAGE



We focused heavily on the undercarriage, creating a track that never comes off so you can concentrate on your job.

## SIMPLY AMAZING



Cormidi CMF series has become the benchmark for machines in its class. Its ability to meet customer's needs regarding great performance, extreme reliability and reduced fuel consumption is outstanding.

# CORMIDI

## C200 DUMPER



DRIVE THE CHANGE

# STRENGTHS

## MAINTENANCE A CLICK



All daily maintenance checks (levels, filters and fuses) are easily accessible, reducing the time taken to inspect the machine

## HOOK TO TOW



The C 200, mounts in the rear, the towing hook.

## CHIAVE DI ACCENSIONE



On the dashboard, among the many services, there is a correlated switchboard with a double key.

## ROPS



Il roll-bar, di serie, protegge l'operatore da schiacciamenti accidentali nel caso di ribaltamento della macchina.

## FOOTPEG



The easy-to-wash rubber mat makes it possible to have a clean and comfortable driving position.

## DASHBOARD



Analogue instrumentation, warning lights, switches, throttle lever are part of a complete and intuitive control panel

## DIRECTIONAL HEADLIGHTS



Whether it is day or night, with the directional headlights, it is possible to illuminate the surrounding area in case of reduced brightness.

## JOYSTICK



Ergonomic, it facilitates and makes it a breeze to guide the C200

## DRIVING POSITION



Everything in its place! adjustable seat, right ground clearance, optimal visibility, no hitch to sit down, the ideal place to work peacefully.

# CORMIDI

## C200

DUMPER



DRIVE THE CHANGE

## THE STANDARD



C200 is the gold standard that drives change in the market. Cormidi machines are more productive, more reliable, and more cost-efficient.

## HEAVY DUTY MACHINE



The undercarriage has been created for the toughest jobs. It is heavy duty and indestructible.

The rubber track's special design is optimized for continuous performance with great traction and a long life with no wear.

## SAFE AND STRONG



Driving a Cormidi machine will help you work more easily in every condition of your hard work, offering you great performance, lower fuel consumption, higher speeds, and the most stability and safety in its class

# CORMIDI

## C200 DUMPER



# STRENGTHS

**CAP WITH KEY**



Lifting the engine hood you immediately have access to the fuel cap; Lockable with the key

**DOUBLE CARTRIDGE AIR FILTER**



Double cartridge ensures greater protection of the engine from dust.

**SERIES ARMREST**



Ergonomics is important; Each joystick has the standard armrest at its rear, installed on the seat.

**HANDLE FOR EASY UP / DOWN**



On both sides there are the handles that help the operator to go up and down towards the driver's seat.

**BULL-BAR**



Great for pushing objects, but designed to protect the operator and the machine in tight maneuvers.

**STEEL LIFTING HOOKS**



4 hooks are present on the perimeter of the undercarriage; 2 on the left side and 2 on the right side, allow lifting and anchoring during transport.

**BATTERY SWITCH**



Important to inhibit start-up, necessary to interrupt the electrical circuit and safeguard your C200.

**DOCUMENT HOLDER WITH CLOSING**







Behind the seat, easily reachable, is the briefcase.

**SERIES SAFETY BELTS**



Safety is always in the first place! The belts are equipped with all C200s.




# DUMPER SKIP

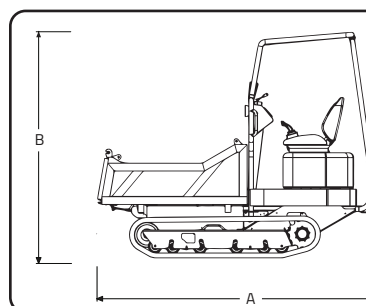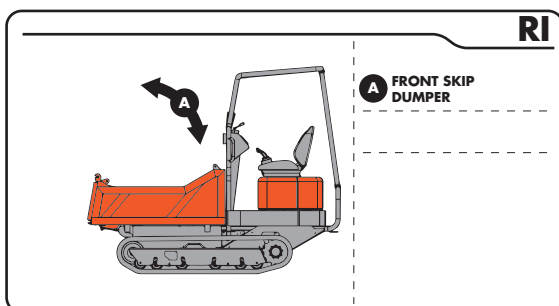

|   | mm   | in    |
|---|------|-------|
| A | 2800 | 110.2 |
| B | 2350 | 92.5  |
| C | 1260 | 49.6  |
| D | 744  | 29.3  |




|                    |  |                                             |
|--------------------|--|---------------------------------------------|
| OPERATIVE CAPACITY |  | 2000 kg<br>4409 Lb                          |
| MACHINE WEIGHT     |  |                                             |
| STRUCK             |  | 0,62 m <sup>3</sup><br>0.81 yd <sup>3</sup> |
| HEAPED SAE         |  | 0,98 m <sup>3</sup><br>1.28 yd <sup>3</sup> |

SKIP DUMPER AND SWIVEL

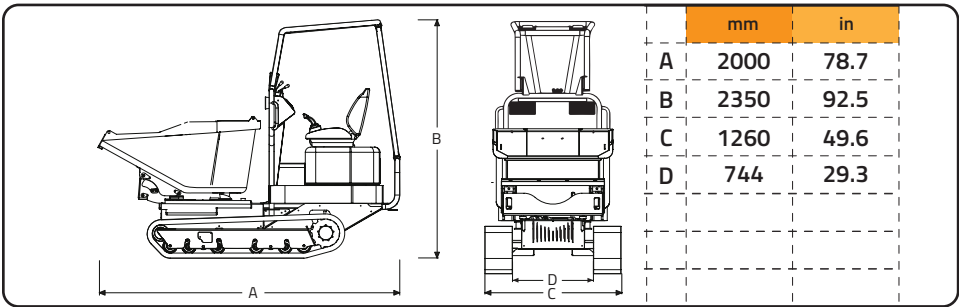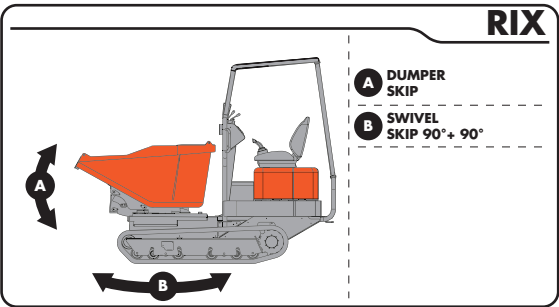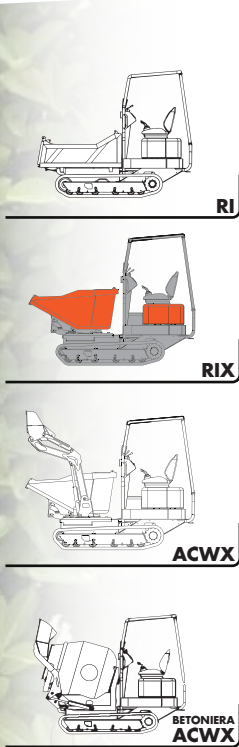




|                    |  |                     |
|--------------------|--|---------------------|
| OPERATIVE CAPACITY |  | 2000 kg<br>4409 Lb  |
| MACHINE WEIGHT     |  | -<br>-              |
| STRUCK             |  | 0,65<br>0.85 yd³    |
| HEAPED SAE         |  | 0,94 m³<br>1,23 yd³ |

SELF LOADING AND SWIVEL

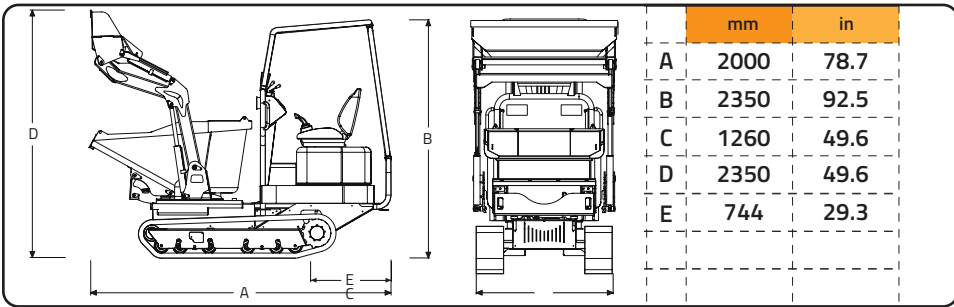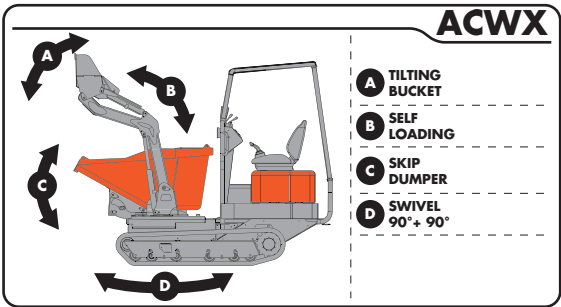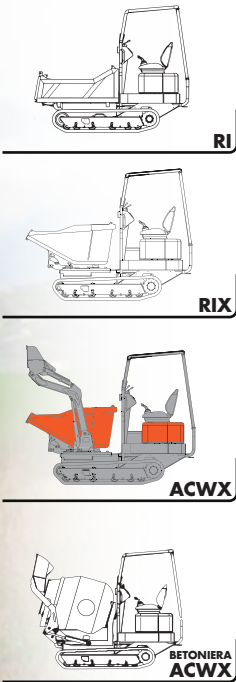

|                    |  |                     |
|--------------------|--|---------------------|
| OPERATIVE CAPACITY |  | 2000 kg<br>4409 Lb  |
| MACHINE WEIGHT     |  | 2050 kg<br>4520 Lb  |
| STRUCK             |  | 0,65<br>0.85 yd³    |
| HEAPED SAE         |  | 0,94 m³<br>1,23 yd³ |

# SELF LOADING CONCRETE MIX

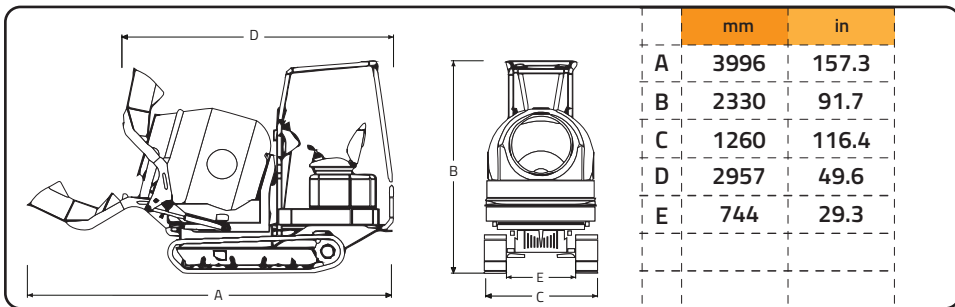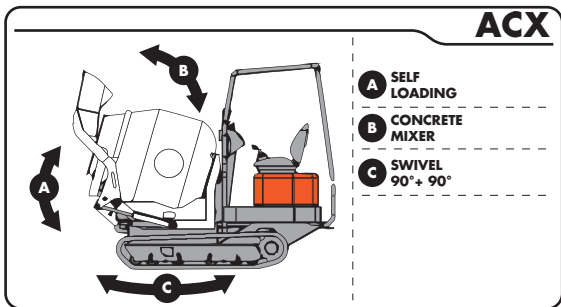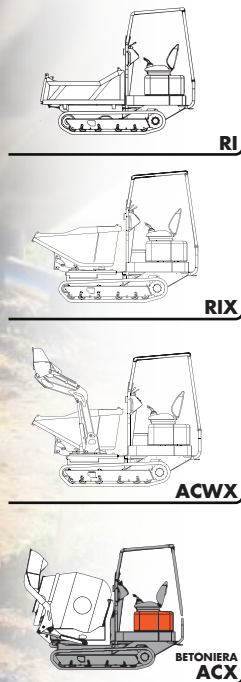

|                    |  |                    |
|--------------------|--|--------------------|
| OPERATIVE CAPACITY |  | 2000 kg<br>4409 Lb |
| MACHINE WEIGHT     |  |                    |
| STRUCK             |  | 400 lt<br>106 gal  |
| HEAPED SAE         |  | 1000 lt<br>264 gal |

# SPECIFICHE TECNICHE

SPECIFICHE

METRIC | U.S.

C31.200  
2000 kg  
4409 lb

## Engine

|        |                     |   |
|--------|---------------------|---|
| Diesel | Yanmar 3TNV82 31 hp | ● |
|--------|---------------------|---|

## Transmission

|                |                           |   |
|----------------|---------------------------|---|
| Type           | Idrostatica               | ● |
| Hydraulic pump | 2x port.variabile         | ● |
| Flow Std       | 2 x 48 l/min (2x12.6 gpm) | ● |

## Tracks

|                     |                |   |
|---------------------|----------------|---|
| Stand. tracks width | 280 mm (11 in) | ● |
| Rocking Rollers     | Yes            | ● |

## Hydraulic system

|                |                        |   |
|----------------|------------------------|---|
| Hydraulic pump | Gear pump              | ● |
| Flow std       | 1x33 l/min (1x8.7 gpm) | ● |
| Max pressure   | 170 bar (2470 psi)     | ● |

## Performance and dimensions

|                   |                                          |   |
|-------------------|------------------------------------------|---|
| Max. Travel Speed | 0-7.5 km/h (0-4.7 mph)                   | ● |
| Operative weight  | 2000 kg (2203 lb)                        | ● |
| Dry Weight        | 1400 kg (3084 lb) to/a 1900 kg (4185 lb) | ● |
| Parking brake     | Yes                                      | ● |



**DRIVE THE CHANGE**

**[WWW.CORMIDI.COM](http://WWW.CORMIDI.COM)**



**DRIVE YOUR CHANGE**

Please note: The machines and accessories depicted in brochures and catalogues can vary from version to version, therefore please consult your distributor for a description of standard accessories and options available for each model. Cormidi reserves the right to change or to modify the specification of the machines without warning. The photos in catalogues and brochures represent the Cormidi machines in production at time of printing. However, newer and upgraded models may look different to the photos shown in this catalogue or brochure.



Via Fonte, 342 Roccadaspide  
(SA) Italy  
ph. +39 0828 943688  
fax +39 0828 943963

**CORMIDI**

info@cormidi.com - www.cormidi.com

25 Broad St, Norwalk  
CT 06851, USA  
ph.+1 203-846-6120  
art@cormidiusa.com

